CANTECH
Trading L.L.C.

PRODUCT CATALOGUE

www.cantech.ae

CANTECH
Trading L.L.C.

Cantech Trading L.L.C is one of the leading professional Hardware & Tools suppliers based in the UAE, who trades directly with the manufacturers of quality tools, hardware and genuine spare parts. The company, with its unparalleled services and ability to source superior goods from the vast network of suppliers and manufacturers, has earned the reputation of one of the most trusted suppliers in the middle-east.

Cantech Trading LLC aims at building fruitful, lasting relationships with the clients. Our market knowledge and years of experience international trading enable us to deliver high quality products and other allied services on time at competitive prices. Our currents list of products include accessories for the construction industry, the marine industry, general trading, oil & gas companies. We are planing to expand our range of products and services to meet the increasing demands of our treasured customers.

Quality, Integrity, Social Responsibility are our guiding factors. We are committed to constant improvement in every market segment we serve and all our efforts are and will be channelized towards bringing about value addition to our clients, customers and vendors.

Cantech Trading L.L.C | Deyaar Building | Office Number -113 | Damascus Street | Al-Qusais - Dubai | Uae
P.o.box: 33158 | Tel:+971 4 2632647 | Fax+971 4 2632649 | Mob : +971554781754 | sales@cantech.ae | www.cantech.ae

PRODUCT CATALOGUE

CONTENTS

VALVES	6	FORGED SWING CHECK VALVE	31
PIPE FLANGES	7	FORGED GATE VALVE	32
BRASS FITTINGS	8	FORGED GLOBE VALVE	33
DRILL & ROUTER BITS	9	VALVES	34
BLACK MALLEABLE FITTINGS	10	ELECTRICAL	36
MATERIAL HANDLING	16	ELECTRICAL	38
HAND TOOLS	17	ELECTRICAL	40
SEALS	20	WELDING CONSUMABLES	42
BEARINGS	21	WELDING CONSUMABLES	44
PAINTING CONSUMABLES	24	SAFETY ITEMS	46
PAINTING ACCESSORIES	26	SAFETY ITEMS	48
SMALL TOOLS	28	PACKAGING	50
MACHINING	30		

PIPE FLANGES

Stainless Steel Bushing

Stainless Steel 45 Elbow

Available in

304/304L Cast Stainless Steel 2000 lb & 3000 lb Threaded 1/8" - 4"
304/304L Cast Stainless Steel 3000 lb Socket Weld 1/8" - 4"
316/316L Forged Stainless Steel 2000 lb & 3000 lb Threaded 1/8" - 4"
316/316L Forged Stainless St

Stainless Steel Cross

Stainless Steel Coupling

Available in

304/304L Cast Stainless Steel 3000 lb Threaded & Socket Weld 1/8" - 4"
316/316L Forged Stainless Steel 3000 lb Threaded & Socet Weld 1/8" - 4"
Reducing Coupling in 304/304L Cast Stainless Steel 3000 lb Threaded & Socket Weld 1/8" - 4"
Reducing Coupling in 316/316L Forged Stainless Steel 3000 lb Threaded & Socket Weld 1/8" - 4"

Stainless Steel Plug

Stainless Steel Street 45 Elbow

Available in

304/304L Cast Stainless Steel 3000 lb. Threaded 1/8" - 1"
316/316L Forged Stainless

Stainless Steel Tee

Stainless Steel Street 90 Elbow

Available in

304/304L Cast Stainless Steel 3000 lb. Threaded 1/8" - 1"
316/316L Forged Stainless Steel 3000 lb. Threaded 1/8" - 1"

Pipe flanges based on Pressure-Temperature (PT) rating:

Based on the PT rating the flanges are classified as:

150#, 300#, 400#, 600#, 900#, 1500#, 2500#

The PT rating charts as specified in ASME B16.5 specify the working pressure which a flange can withstand at a particular temperature. The indicated pressure class of 150#, 300#, etc is the basic ratings and the flanges can withstand higher pressure at lower temperatures.

ASME B16.5 indicates the allowable pressure for different materials of construction at different temperature.

Pipe flanges based on Pipe Attachment:

One way to classify flanges is their method of attachment to the pipe.

Slip-on Flanges
Socket-Weld Flanges
Screwed/Threaded Flanges
Lap-joint Flanges
Welding neck Flanges
Blind Flanges
Reducing Flanges

Pipe flanges based on Facing:

There are different flange facing used in the pipe system depending upon the fluid, PT rating, material of construction, connecting equipment etc.

Flat Face (FF) Flanges
Raised Face (RF) Flanges
Male-Female (M/F) Face Flanges
Tongue-Groove (T/G) Face Flanges
Ring Type Joint (RTJ) Flanges
ASTM A105- Forged Carbon Steel
ASTM A181- Forged Carbon Steel for General Purpose
ASTM A182- Forged Alloy Steel and Stainless Steel
ASTM A350- Forged Alloy Steel for Low Temperature Services.

BRASS FITTINGS

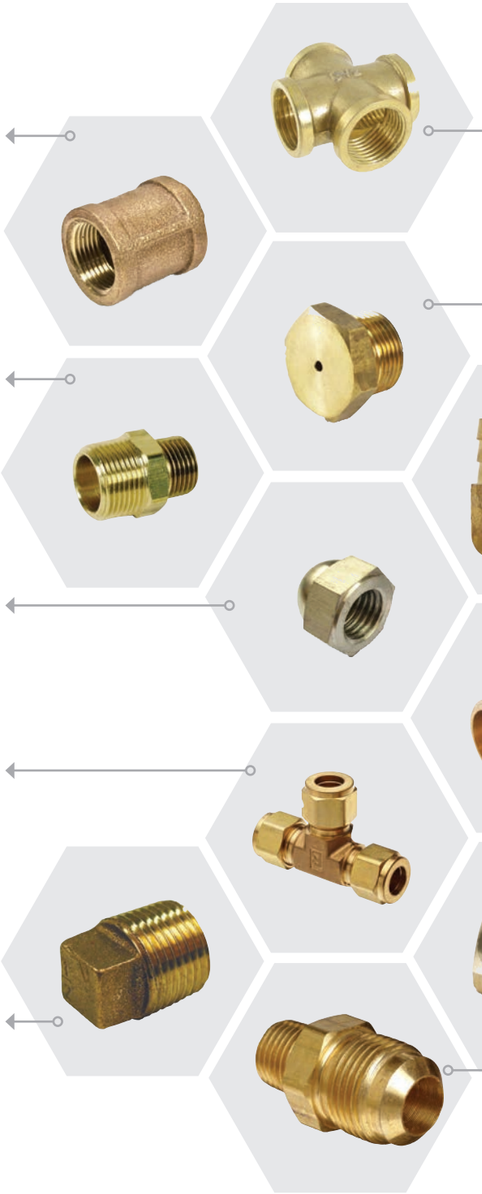

Brass Coupling

Available in

125# Threaded 1/8" - 4"

250# Threaded 1/4" - 3"

125# Threaded Reducing Coupling
Available in 1/4" x 1/8" - 4" x 3"

Brass Nipples

Meets or exceeds all applicable ANSI standards

125# Stocked from 1/8" through 4" diameters

Available in lengths through 24"

Specialty items such as Toe Nipples are available

Brass Cap

Available in

125# Threaded 1/8" - 4"

250# Threaded 1/4" - 3"

Brass Tee

Available in

125# Threaded 1/8" - 4"

250# Threaded 1/4" - 3"

125# Threaded Reducing Tee
Available in 1/4" x 1/8" - 4" x 3"
and 1/2" x 1/2" x 3/4" - 2" x 3/4" x 2"

Brass Solid Plug

Available in

125# Threaded 1/8" - 4"

Brass Cross

Available in

125# Threaded 1/8" - 2-1/2"

250# Threaded 1/4" - 2"

Brass Plug

Available in

125# Threaded 1/8" - 4"

Brass 90 Elbow

Available in

125# Threaded 1/8" - 4"

250# Threaded 1/4" - 3"

125# Reducing 90 Elbow
Available in 1/4" x 1/8" - 4" x 3"

Brass Bushing

Available in

125# Threaded 1/4" x 1/8" - 4" x 3"

Brass Locknut

Available in

125# Threaded 1/8" - 4"

Brass Union

Available in

125# Threaded 1/8" - 4"

250# Threaded 1/4" - 2-1/2"

DRILL & ROUTER BITS

Twist Drill Bits

CNC Router Bits

Wood Drilling Bits

BLACK MALLEABLE FITTINGS

Black Malleable Locknut

Available in

150# Threaded 1/8" - 6"

Black Malleable Tee

Available in

150# Threaded 1/8" - 6"

300# Threaded 1/4" - 4"

150# Black Malleable Street Tee
Available in 1/2" - 1-1/2"

150# Bull Head Tee
Available in 1/2" x 1/2" x 3/4" - 2" x 2" x 2-1/2"

Black Malleable Hex Bushing

Available in

150# Threaded 1/4" x 1/8" - 8" x 5"



Black Malleable Cap

Available in

150# Threaded 1/8" - 6"

300# Threaded 3/8" - 4"

Black Malleable Side Outlet Elbow

Available in

150# Threaded 1/4" - 2"

Black Malleable 90 Elbow

Available in

150# Threaded 1/8" - 6"

300# Threaded 1/4" - 4"

150# Reducing 90 Elbow
Available in 1/4" x 1/8" - 4" x 3"

Black Malleable Cross

Available in

150# Threaded 1/8" - 4"

Black Malleable Reducing Tee

Available in

150# Threaded 1/4" x 1/8" - 6" x 3"

300# Threaded 3/4" x 1/2" - 3" x 2"

Black Malleable Union

Available in

150# Threaded 1/8" - 4"

300# Threaded 1/8" - 4"

150# Reducing Union Available in 3/4" x 1/2"

Black Malleable Street 45 Elbow

Available in

150# Threaded 1/8" - 4"

Black Malleable Square Head Plug

Available in

150# Threaded 1/8" - 6"

Black Malleable Reducing Coupling

Available in

150# Threaded 1/4" x 1/8" - 6" x 4"

300# Threaded 3/8" x 1/4" - 4" x 3"

Black Malleable Street 90 Elbow

Available in

150# Threaded 1/8" - 6"

300# Threaded 1/4" - 4"

Black Malleable Couplings

Available in

150# Threaded 1/8" - 6"

300# Threaded 1/4" - 4"

150# Right & Left Coupling (Chinese Only)
Available in 1/2" - 4"

150# Extension Piece Available in 1/2" - 2"

Black Malleable 45 Elbow

Available in

150# Threaded 1/8" - 6"

300# Threaded 1/4" - 4"

ELBOWS

Stailess Steel Plug

Stailess Steel Bushing

Stainless Steel Street 45 Elbow

Available in

304/304L Cast Stainless Steel 3000 lb.Threaded 1/8" - 1"

316/316L Forged Stainless Steel 3000 lb. Threaded 1/8" - 1"

Stainless Steel Street 90 Elbow

Available in

304/304L Cast Stainless Steel 3000 lb. Threaded 1/8" - 1"

316/316L Forged Stainless Steel 3000 lb. Threaded 1/8" - 1"

Stainless Steel Coupling

Available in

304/304L Cast Stainless Steel 3000 lb Threaded & Socket Weld 1/8" - 4"

316/316LForged Stainless Steel 3000 lb

Threaded & Socet Weld 1/8" - 4"

Stainless Steel 45 Elbow

Available in

304/304L Cast Stainless Steel 2000 lb & 3000 lb Threaded 1/8" - 4"

304/304L Cast Stainless Steel 3000 lb Socket Weld 1/8" - 4"

316/316LForged Stainless Steel 3000 lb Socket Weld 1/8" - 4"

Stailess Steel Cross

Stainless Steel Tee

POWER TOOLS

Cordless Driver Drill

BDF451Z 13mm 18V Li-ion

Cordless Drill/Driver 3 Speed (2 x 3AH Batteries)

BHP451Z – 13mm (1/2")

No Load Speed	Hi:0-1,700 rpm
	Lo:0-300 rpm
Max. Fastening torque	Hard/Soft: 80/40 N.m
Net weight	2.1 kg

Cordless Percussion Driver Drill

BHP451Z – 13mm (1/2")

No Load Speed	Hi:0-1,700 rpm
	Lo:0-300 rpm
Max. Fastening torque	Hard/Soft: 80/40 N.m
Net weight	2.2 kg

Cordless Impact Driver

TD02DSE

Capacity	Machine Screw/
	Standard Bolt M3-M8
Impact per minute	0-3,200 ipm
Max. Fastening torque	145 N.m
No Load Speed	0-2,300 rpm
Net weight	1.5 kg

Cordless Impact Driver

BTD140Z

Impact per minute	0-3,200 ipm
Max. Fastening torque	145 N.m
No Load Speed	0-2,300 rpm
Net weight	1.5 kg

POWER TOOLS

Corded Rotary Hammer Drill

650W 22mm

Two mode, 650 Watt, 4150 bpm

4-22mm - concrete/masonry

Impact stop - wood/steel/plastic

Variable speed switch

Scrolling and Orbital action Jigsaw

Amps - 5.5 Amps

Strokes/Min - 800 - 3,200 spm

Stroke Length - 3/4 "

Keyless Blade Clamp

Blade Type - Accepts U & T shank blades

Variable-Speed Trigger

Electronic Variable Speed

Orbital Action

Magnetic drill 2 speed

High performance for fast and accurate cuts in steel.

Compact and lightweight drill to be used on all sites.

Protection 3 LED allowing for better control and prevention of engine damage.

Sheet Finisher Sander

Ergonomic palm grip design provides optimal balance for comfort and control.

Full body soft grips maximize comfort and gripping power.

Built in dust collection for a cleaner work area.

Dust-sealed switch protects internals and extends life of tool.

1/4 sheet sander is flush on three sides for improved functionality when sanding to vertical surfaces.

Convenient paper clamps for ease of use when changing sandpaper

Road Breaker 16-30

Rated power input: 1.700 W

Impact rate at rated speed: 1.300 rpm

Impact energy: 45 J

Tool holder: 30 mm internal hexagon

Weight: 17.80 kg

Package: Color Sleeve & BMC packing

Cassette Circular Saw C18DL(H4) - 18V

Capacity: 90°: 57mm / 45°: 40mm

No Load Speed: 3,400 (min-1)

Blade: 165mm 24TPI

Angle Cutting: 0 - 45°

Weight: 3.2kg (with BCL1840 battery)

Length: 351mm (with BCL1840 battery)

Battery Type: Compatible with 18V Li-ion, Ni-Cd and Ni-MH cassette batteries

Planer HSS Blade 82mm 500W

Compact and lightweight

High rotation speed

Complete with HSS blades

Cutting Width: 82mm (3-1/4")

Max. Cutting Depth: 1mm (1/32")

Power Input: 500W

No Load Speed: 15,000/min.

Overall Length: 296mm (11-21/32")

Weight: 2.5Kg (5.5lbs.)

Standard Accessories: Blades, Blade Setting Gauge, Guide and Wrench

MATERIAL HANDLING

Casters

Chains


Drum Handling

Eyebolts

Hoist Cranes

Hooks


Jacks

Pallet Trucks

Pipe Hangers

Pulleys & Blocks

Shackles

Sheaves

Slings

Snaps

Turntables

Wheel Barrows

Wheels

Winches

Wire Rope

Hoist Rings

HAND TOOLS

Bearing & Gear Pullers

Bearing Heaters

Pipe & Adjustable Wrenches

Hammers, Nailers, Staplers

Screwdrivers & Bits

Impact Wrenches

Pliers, Retrieving Tools

Spanners & Drum Wrenches

Box wrenches

Open End Wrenches

Ratchets & Sockets

Screw & Pipe Extractors

Nut Drivers

Combination Wrenches

Torque Wrenches

Tool Box

MEASURING, LAVELING & INSPECTING

Angle Indicators

Bore Gauges



Calipers

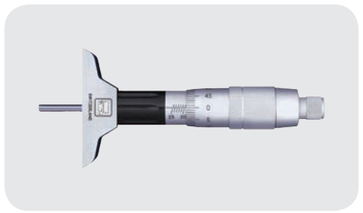

Depth Micrometers

Feeler Gauge

Gauges

Levels

Micrometers

Tape Rules

Thread Gauge

Rules

Protractors

NUTS AND BOLTS

Auto Mobile Components

Der drawing and specification.-
of customers Spindle Nuts,
Collar Nuts, Taper Nuts,
Flange Nuts, Weld Nuts,
Castle Nuts, Slotted Nuts, Lock Nuts
As per relevant standards.
Size range M6toM48
Astm Fully Threaded Studs:
Gr. B-7. L-7, B-T6. B-8
Nuts- 2H: Gr. 4. Gr. 7
Eye Bolts : B-7 Size: M6toM 56.
Length: 1 Meter Parralel Keys EN-8

High Tensile Hex Bolts

Grade: 8.8.10.9,12.9,
as per IS per IS : 1364,
DIN 931/933, BS 1768.
ANS118.2.1
Range 4 mm to 72 mm,
Length : 1000mm
ATING : Auto Black, Zink,
Cadium, Tin, Hot Dip Galvanised

Hex Precision Nuts

Grade : 8,10,12. Cold Forged.

Machined Nuts,forged Nuts.

M 4 to M 12.
M 14 to M 20.
M 22 to M 56 to M 72
As per IS : 1364.
IS : 2232. BS 1083.
Bs 1768/1769. Din 934

All Kinds of Special Bolts

Square Bolt. Fit Bolt, CSK Bolt, T-Boit,
High Strength Friction Grip Bolt,
CSK Socket Head.
As per itomer's drawing and
materials specifications-
M12 to 72, Length: 1000mm

SEALS

A mechanical seal is a device that helps join systems or mechanisms together by preventing leakage (e.g. in a plumbing system), containing pressure, or excluding contamination.

The effectiveness of a seal is dependent on adhesion in the case of sealants and compression in the case of gaskets.

BEARINGS

Bearings enhance the functionality of machinery and help to save energy. Bearings do their work silently, in tough environments, hidden in machinery where we can't see them. Nevertheless, bearings are crucial for the stable operation of machinery and for ensuring its top performance.

Angular Contact Ball Bearings

Deep Groove Ball Bearings

Taper Roller Bearings

Double Row Self-Aligning Bearings



Clutch release Bearings

Special Purpose Bearings

Spherical Roller Bearings



Clutch release Bearings

Deep Groove Ball Bearings

Needle Bearings

PACKING & JOINTING

Gland Packing in all Temperature and Sizes

Reinforced Sheet

Oil Jointing Sheet



Rubber Sheet

Viton, Silicon

Asbestos

Neoprene



Non Asbestos Sheet

HOSE

5/8 in. x 15 ft. Short Length Water Hose

The Apex 5/8 in. x 15 ft. short-length hose is perfect for applications when only a 15 ft. hose is needed. This hose can be used as a leader hose for hose reels and as a hose extension. Ideal for use on decks, patios, and small yards. It is lightweight, flexible and tucks away neatly between uses.

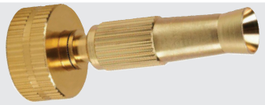

Metal Hose Nozzle

The class is design and sturdy all metal Melnor 505S Hose Nozzle is perfect for cleaning chores or watering the garden. The easy to use, twisting adjustment provide everything from a gentle mist to a blasting stream.

Y Shut-Off 2-Way Metal Hose Connector

For maximum watering flexibility, the 2 Way Metal Hose Connector allows a simple way to connect two hoses. The built in shut offs makes it easy and efficient to water, while still being able to position the hoses where they are needed. Allows watering in more areas, and provides watering options.

1/2 in. x 50 ft. Coil Water Hose

Tired of recoiling your garden hose after each use. This coiled hose may be the answer you're looking for. It expands and retracks easily and the hanging rack can be easily mounted for convenient storage.

Metal Hose Shut-Off

Adding a shut-off to a hose end or faucet provides an easy way to control water flow with the twist of a switch. Melnor's 395C is made of metal for long-life while the valve provides simple flow control.

7-Pattern Rear-Trigger Nozzle

The 7-Pattern Water Nozzle features a rubberized adjustment ring that allows you to select from 7 unique spray patterns. The metal construction provides durability. It has a Rubberized grip, trigger and adjustment ring.

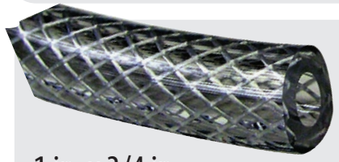

1 in. x 3/4 in. Vinyl Braided Tubing

Polyester braided reinforced PVC tubing has the strength to withstand four times the working pressure of single wall PVC. The smooth, dense bore of the tubing maximizes flow rate and reduces sediment buildup. It has excellent resistance to acids, alkalis and many solvents, and handles a wide variety of chemicals, gases and liquids.

100 ft. Hose Capacity Side Tracker Wall Mount Hose Reel

For convenient hose storage, try the Suncast Corporation Side Tracker 100 ft. Hose Reel. The manual crank can make rolling up your hose quick and easy. It has a wall-mount design with detachable reel for winter storage. Hose guide provides some assistance when rewinding hose onto the reel. Fully assembled unit, ready to use the minute you get home. Leader hose included. Durable resin construction will not leave rust marks on your home.

PAINTING CONSUMABLES

Woodshield Exterior Stain

Woodshield Exterior has been specifically formulated to offer you great flexibility, deep penetration, and twice the UV protection than conventional wood finish products. Which means that you can now protect all your exterior wood for twice as long. Woodshield Exterior Varnish is a Clear coating and is available in Gloss & Matt finishes.

Dulux Trade Floorshield

Due to excellent film hardness and erosion resistance, Floorshield from Dulux Trade is capable of standing up to scuffing in light to medium traffic areas, mild chemical spillage and repeated washing. Under normal circumstances, this ensures your environment achieves a lasting, high-quality look.

Hard Wearing; For Light to Medium Traffic Areas; Mid-Sheen Finish.

Jotun Jotamastic 87 SF

High performance corrosion resistance on steel

For use as a primer where blast cleaning is not possible (power tool St 2 minimum)

As a finish coat when gloss retention is not important

Apply to suitable prepared substrate 2 coats of Jotamastic 87 SF

NATIONAL PAINTS
Since 1969

Dulux Spraypak 325g Vivid White Enamel Spray Paint

Dulux Quick Dry is an interior/exterior enamel which dries to a smooth, professional finish. The unique combination of technology provides superior coverage, durability and hardness. It can be used on most common surfaces including metal, wood and masonry.

Hempel Thinner 811 (No.1)

No 1 White spirit based thinner containing paint conditioner for use with: Yacht Primer Undercoat, Brilliant Enamel, Yacht Enamel, Grey Metallic Wood Primer, Favourite Varnish, Classic Varnish & Dura-Gloss/ Satin Varnishes. Also spray thinners for Brilliant Enamel & Yacht Enamel.

Jotashield Extreme

Jotashield Extreme is the most durable paint for the harsh tropical climate. It utilizes a 100% Extreme Acrylic formula, which comes with both 2x UV Protected Colours and 2x Heat Reflective Technology.

These features have been tested and certified by independent test labs.

Dulux Metalshield 300g Black Topcoat Spray Paint

A fast dry spraypak coating that can be applied to new bare steel, wrought iron and pre-painted surfaces. It is ideal for the application of detailed and hard to reach areas such as steel brackets, lacework and garden furniture.

Gardex Premium Gloss

Gardex Premium Gloss enhances the surfaces of your wood and metal projects. Express yourself through the elegant finishing of the surfaces after using Gardex Premium Gloss. Get total beauty and durability all in one finish.

Product type: Exterior Paints

Area of use: Doors, Frames, Trim, Window, Furniture, Ceiling

Envi Wall Putty

Envi Wall Putty is white acrylic primer coat with main function as wall pores cover resulting smooth wall substrate.

Envi Wall Putty is formulated to have excellence adhesivity and coverage spread hence it can be used as wood putty for smooth and glossy wood coating.

ADVANTAGES :

Excellence pores coverage spread, Excellence adhesivity, Easy to be sanded, Easy application

PAINTING ACCESSORIES

Linzer 3 in. Chip Brush

The convenient Economy 3 in. Chip Brush head features white Chinese bristle for quality. The natural wood handle is light-weight for comfortable use. The brush is disposable, ideal for touchups.

Flat Paint Brush Set (3-Piece)

The Economy3-Piece Flat Paint Brush Set is an inexpensive utility-quality set that's suitable for one-time use. Each brush has polyester bristles and includes an angled sash brush, making it ideal for most common paint jobs.

Roman 6 in. Foam Smoothing Roller

Foam smoothing roller to apply wallpaper. Gently smoothes down wallpaper and bubbles. Allows you to correctly position the wallpaper.

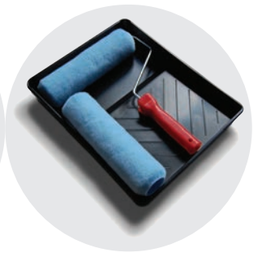

Wooster 11 in. Plastic Deluxe

Deluxe-quality, rust-proof, solvent-resistant, copolymer polypropylene paint tray. Because this tray is plastic, it will not rust, or dent. Use with all 9 in. roller covers or smaller. Sturdy, ribbed roll-off area for even loading.

3M 9 in. x 11 in. 220 Grit Fine Advanced Sanding Sheets

3M Pro Grade PrecisionAdvanced Abrasives are now better than ever thanks to the combination of no-slip grip backing and premium mineral technology. Ideal for paint, wood and metal surfaces. Rinse and reuse. 220 grit, 4 sheets per pack.

Roman 6 in. Foam Smoothing Roller

The Economy Putty Knife Set includes 2 in., 4 in. and 6 in. polypropylene putty knives. This multi-purpose set allows you to complete all of your jobs and dispose of the tools when done.

2 in. blade, 4 in. blade and 6 in. blade, Polypropylene construction, Black, Disposable

2.4-Amp 1/4-Sheet Pad Sander

The DEWALT 1/4-Sheet Pad Sander features a powerful 2.4 Amp motor that produces 14,000 orbits per minute for a smooth finish. The sealed, 100% ball-bearing construction helps provide a long life, while the textured anti-slip top and body grips provide control and offer a comfortable grasp as you work. The dust collection bag captures dust and keeps it away from the sight line, while the dust-sealed switch offers durable operation.

5 in. Random-Orbit Palm Sander

The Black and Decker 5 in. Random-Orbit Palm Sander features a powerful 2-Amp motor that delivers up to 12,000 OPM, and its random-orbiting action provides a smooth finish and fast material removal. The switch is sealed against dust to help protect internal components, and dust is conveniently collected in a bag. This sander is also adaptable to shop vacs for easier cleanup. A sanding disc and dust bag are included for added value and convenience.

007 HVLP Paint Gun System

Designed for professional painters, the innovative 007 HVLP Paint Gun System allows users to quickly change paints by simply changing head units. Featuring high atomization and good flow, the fine-tune controls are easy to adjust. A large full spectrum fan allows users to accurately place paint with minimum over-spray and virtually no orange peel.

Wagner 9 in. Smart SideKick Multi-Room Powered Roller System

The Smart SideKick Multi-Room Powered Roller is ideal for large or multi-room projects. Wagner's innovative direct-feed roller system pulls paint directly from a 1 to 5 gallon container to continuously feed the paint roller for productive drip-free, non-stop painting. The Smart SideKick comes with one 9 in. - 3/8 in. nap Wagner roller cover and one adapter for 5-gallon containers.

Graco X7 Airless Paint Sprayer

The Magnum X7 Airless Paint Sprayer is a great choice for homeowners or handymen that have occasional painting projects. It features an Auto Prime design to ensure fast priming and a Power Flush system for easy cleaning. This sprayer includes an SG2 metal spray gun which features a full trigger and in-handle filter. The cart can transport a 5-gal. bucket with the Paint Saver pail hook.

Wagner Flexio 570 HVLP Paint Sprayer

The Wagner Flexio 570 is an indoor/outdoor hand-held sprayer for all projects. The X-Boost turbine produces unmatched power with two control settings for ideal coverage, and low overspray. The iSpray nozzle delivers a professional finish spaying broad surfaces with residential unthinned paints. The Flexio provides advanced user comfort being 50% quieter and 20% lighter than traditional airless sprayers.

SMALL TOOLS

Max®
Magnetic Short Tape Metric

Features & Benefits

- Ergonomic bimaterial case
- Mylar coated blade for a better blade protection, up to 10 times than a regular blade
- Larger blade graphics for 28 mm version
- 3 Rivets hook
- Metal wear plate inside the mouth for 28 mm version

FatMax®
Cable Cutter

Features & Benefits

- Bi-material handle with secure grip grooving
- Heat treated high chrome steel forging for long life and durability
- Hand ground, induction hardened blade for long life and high quality accuracy
- Interlocking joint assembly for smooth cutting

Universal Hand Saw
Resharpenable

Features & Benefits

- HARD POINT treatment increasing the longevity of the cut
- 7, 9 and 12 teeth per inch for a medium throughput cut
- Universal toothing with double bevelling by rectification
- Allows marking at 45° and 90°
- Swedish quality steel blade

24" Mag Box Beam Level

Features & Benefits

- Large cross section for 5x stronger level
- Block vials for best durability and accuracy to 0.0005"/in
- Magnified center vial maximizes vial readability
- Robust metal + over-mold end caps provide superior shock resistance
- Die-cast center vial holder maintains level accuracy under abusive work conditions
- Bridged center vial for continuous marking edge and body rigidity

Fiberglass
Nail Hammers

Features & Benefits

- Improved handle design for greater comfort & control
- Tape Lock union between head and shaft for safety Meets ANSI standards
- Fiberglass shaft with polypropylene outer jacket

Maxsteel™
Adjustable Wrenches

Features & Benefits

- Polished chrome finish for anti-corrosion protection
- Phosphate finish
- Maxsteel bimateiral handle
- At ISO 6787 / DIN 3117 / ASME B 107.8M specifications

3 Piece Cushion Grip
Flared & Phillips set

Features & Benefits

- Soft grip handle – perfect combination of great grip plus reduces fatigue
- Product ID on the handle allows for self selection at POS
- Shot blasted magnetic tips ensure a stronger screw pick up

Folding Retractable
Utility Knife

Features & Benefits

- Retractable blade offers variable cut depth
- Rapid load™ blade changing system for quick blade changes
- Folding feature for quick and easy one-handed opening/closing

DEWALT
HITACHI
BOSCH
BLACK&DECKER
makita
STANLEY

FORGED SWING CHECK VALVE

Ultraform Fx™

Ultraform FX is perfect for machines with precision stroke control. A fixed length forming tool, Ultraform FX lets you take advantage of machine programming. As with all Ultraform products, it features grooved lubrication grooves and multiple angle settings. Ultra-form FX uses Mate's Ultraform insert system allowing you to have an unlimited number of forming tools with one holder to help you reduce your tooling spend. Plus if you already have Ultraform or Ultraform XT holders, the inserts are fully interchangeable.

Tapping Tools

Fully compatible with punch press performance in terms of speed, accuracy & consistency

Rolled thread in flat plate & burred hole Threads are inter-changeable via quick change cartridge mechanism

Standard: M3, M4, M5 (unit 1)

M5, M6 (unit 2)

Option: M2.5, M2.6

UNC (up to 10-24)

Whitworth (up to 1/4"-40)

M2 & M8 only available in
D Station too

Ratcheting pipe threader tool set.

Product details:

5 popular interchangeable sized cutting dies, sizes include: 3/8", 1/2", 3/4", 1" and 1-1/4"

Ratchet head with two piece handle

Blow molded storage case keeps tools in order

Ridgid 600-C Power Pipe Theader Machine 13661 - 110V

Features

Motor: Universal, reversible 1020 W motor ~ 25 - 60 Hz.

Switch: Heavy-duty paddle-type switch with safety lock-off switch. Separate Forward / Reverse switch.

Gear Head: Spur and worm gear reduction drive.

Gear Housing: Die cast aluminium.

Body & Handle: Heavy-duty fiberglass reinforced plastic.

Spindle Speed: 32 RPM (no load).

Die Heads: 11-R.

Capacity: 1/8" – 1 1/4" pipe.

Weight: 5,5 kg (machine only).

Support Arm: No. 601.

Tap & Die Set

Manufactured from alloy steel

Iron case packed

35mm plug taps (bottoming): size as dies.

2 Tap wrenches

T type wrench 1/4" capacity

Die handle 1" OD

Die handle 11/2" OD

Forged Swing Check Valve

Features

Class 800

Socket weld ends carbon steel or 316L stainless steel

Threaded ends carbon Steel or 316 stainless steel

Bolted bonnet

NACE MR-0175

Applicable Standards

Basic Design API 602

Socket Weld ANSI 16.11

Threaded ANSI B1.20.1

Test API 598

Size	Cv	Weight
1/4	5	3.6
3/8	6	3.3
1/2	9	3.3
3/4	10	4.0
1	22	5.6
1-1/4	55	9.3
1-1/2	59	9.3
2	82	16.1

TECHNICAL INFORMATION

Temperature °F	316L Pressure psi	316 Pressure psi	Carbon Pressure psi
-20 to100	1600	1920	1975
200	1350	1655	1800
300	1210	1495	1750
400	1100	1370	1690
500	1020	1275	1595
600	960	1205	1460
650	935	1185	1430
700	915	1150	1420
750	895	1130	1345
800	875	1105	1100
850	860	1080	-
900	-	1050 -	
950	-	1030 -	
1000	-	970	-

FORGED GATE VALVE

Forged Gate Valve

Features

Class 800

Forged steel or forged 316L stainless steel

Bolted bonnet

Rising stem

NACE MR-0175

Applicable Standards

Basic Design API 602

Socket Weld ANSI 16.11

Threaded ANSI B1.20.1

Test API 598

TECHNICAL INFORMATION

Size	CV	Weight
1/4	3	4.5
3/8	5	4.6
1/2	7	4.4
3/4	14	4.8
1	30	7.8
1-1/4	85	11.8
1-1/2	100	13.5
2	160	21.0

Temperature °F	Forged 316L Pressure psi	Forged Steel Pressure psi
-20 to 100	1600	1975
200	1350	1800
300	1210	1750
400	1100	1690
500	1020	1595
600	960	1460
650	935	1430
700	915	1420
750	895	1345
800	875	1100
850	860	-

FORGED GLOBE VALVE

Forged Globe Valve

Features

Class 800

Forged steel or forged 316L stainless steel

Bolted bonnet

Rising stem

NACE MR-0175

Applicable Standards

Basic Design API 602

Socket Weld ANSI 16.11

Threaded ANSI B1.20.1

Test API 598

TECHNICAL INFORMATION

Size	Cv	Weight
1/4	2	2.2
3/8	3	2.3
1/2	3	2.2
3/4	4	2.4
1	6	3.6
1-1/4	14	6.0
1-1/2	14	7.5
2	33	12.5

Temperature °F	Forged 316L Pressure psi	Forged Steel Pressure psi
-20 to 100	1600	1975
200	1350	1800
300	1210	1750
400	1100	1690
500	1020	1595
600	960	1460
650	935	1430
700	915	1420
750	895	1345
800	875	1100
850	860	-

VALVES

Ball valve / metallic

1/2 - 6", class 600 - 2 500, -196 °C, API 6D | AP

CONSTRUCTION

Full or reduced bore, two or three piece body, floating ball, relief seats metal-metal, anti-static device, fire safe, pressure balance hole in ball, blow-out proof stem.

CHARACTERISTICS

High performance low emission double stuffing box.

Internal wetted parts are in acc. to NACE Standars MR0175.

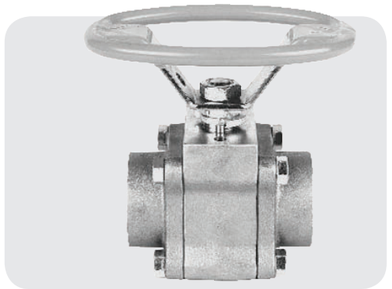

Floating ball valve / 3-piece

1/2 - 6", class 600 - 2 500, API 6D | AP

CONSTRUCTION

Full or reduced bore, two or three piece body, floating ball, relief seats, anti-static device, fire safe, pressure balance hole in ball, blow-out proof stem.

CHARACTERISTICS

High performance low emission double stuffing

iInternal wetted parts are in acc. to NACE Standard MR0175.

Butterfly flap valve / check

DN 32 - 600, 0 - 8 bar | RSK series

This device manufactured by Gemu, is an RSK series butterfly check valve that features a self acting operation. It is capable of working with an operating pressure of 0-8 bar with a nominal diameter of 32-600. In addition, it is composed of a PVC-U , PP or PVDF valve body material.Low pressure drop

100% tight shut off

Ball valve / stainless steel / 3-piece

DN 15 - 100, 1.6 - 6.4 MPa | Q11F-16P/R (3PC)

The Q11F-16P/R is a thread ball valve that can accommodate 1.6 to 6.4 Mpa of pressures in DN15 to DN100 with thermal range of -20 ^{0}C to 60 ^{0}C. This PTFE seated valve has a body material of SS304, SS304L, SS316, and SS316L that strictly complies to GB, ANSI, DIN, and JIS standards.Connection Ends: Threaded (Female/Female), Butt welded, Socket welded (BW, SW), Flanged end

Thread standard: NPT, BSPT. BSP. DIN2999

Testing: API 598

Vortex flow meter / steam

OPTISWIRL 4070

The OPTISWIRL 4070 Vortex Flowmeter is a state-of-the-art equipment that is a pioneer in using built-in pressure and temperature compensation in 2-wire technology. It is perfect for a variety of applications such as vapour and saturated steam measurement, steam boiler monitoring, compressor output monitoring, etc. in chemical, oil and gas, power plants, food and beverage and many more industries. It is extremely reliable equipment in terms of measurement of standard volumetric and mass flow of conductive and nonconductive liquids, gases and vapours, even in continuously changing pressures and temperatures. It is conveniently operated through plug & play and is maintenance-free.

Lubrication system valve

AO series

The Air/Oil AO Series Valve is a series progressive monitoring valve manufactured by Graco. It identifies air line or oil line erros in a system and it consists of a manifold, an air sensor, and check valves. Its key features include a easy-to-use manifold design that can be attached to a standard Graco series progressive divider valve assembly and a check valve design that provides prevention of oil from being forced into the air system.

It can be used in different industries including paper mills and saw mills.

Gate valve / pressure-seal

3/8 - 2"

SUNGO VALVE produce Forged steel gate valve,our company is a specialized supplier and manufacturer of Forged steel gate valve in china.Our Forged steel gate valve in the worldwide and enjoy good fame,If you are interested in any of Forged steel gate valve or your customers require to fill, please contact us right now

Rising plug valve

DN 25 - 300, PN 10 - 40, -100 °C ... +400 °C |

72.4 series

The Type 72.4 MAXIFLUSS Rotary Plug Valve, manufactured by VETEC, has a two-eccentric plug layout. It is available in a plug type housing design with cast steel or stainless cast steel materials.

Needle valve / pressure gauge

1/2", PN 250 | 525 series

The Gauge Holder Valve from the 525 series is composed of stainless steel part, carbon steel body and sealing seat. This device has a needle disc which is integrated with carbon steel. It also has a hand wheel made of steel plate, NPT connections which are threaded and resetting screw.

Unloading relief valve / low-pressure

DN 50 - 100, max. 224 mbar | 66R series

max. 20 psi | R-6100 series

The 66R series is more than just a simple vapor recovery regulator, because of its fast response to changes and accurate control of gas flow. The item also comes with a vacuum source, placed on the regulator's outlet, which you can use for increased flow capacity of any blanketing system operating under a low pressure. Finally, build-up is decreased by a pilot, which also makes the item even more accurate.

Ball valve / wafer

DN 20 - 100, PN 16 | 232 series

Cast iron body. Chromium plated brass ball. PTFE + graphite seats. Brass

stem. Steel lever. Connection flanges dressed and drilled (threaded holes)

according to EN 1092-2 PN 16 with raised face.

Electromagnetic flow meter / wet / water

max. 48 858 m³/s | OPTIFLUX 2000

Engineered and manufactured for the water and wastewater industry

Wide range of approvals for potable water

Long-term reliability and negligible maintenance

The OPTIFLUX 2000 electromagnetic flow sensor is the optimum solution for water and wastewater applications.

Its long-term reliability and durability make it the standard flow sensor for the water industry for measuring abstraction water, drinking water, wastewater, sewage and effluent.

ELECTRICAL

WEN Top Post Battery Terminals (2-Pack)

The NEWEST Technology for Terminal Replacement: this patented design speeds battery terminal replacement, secures the cable inside the terminal, provides superior electrical contact and offers maximum corrosion protection. Since the cable insulation stays intact, the end result is a tightly sealed termination.

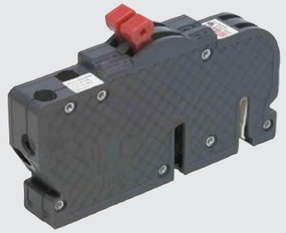

20 Amp Twin-Single Poles Type Z UBI Replacement Circuit Breaker

The Zinsco 20 Amp 3/4 in. Duplex Single-Pole Type Z UBI Replacement Circuit Breaker is a space saver offering 2 circuits in the space of 1. Each pole is 20 amps and the unit has a maximum load of 240 volts. The breaker is designed for use with typical applications up to 2,200 watts, such as kitchen circuits, branch circuits, wall receptacles, electric heaters, dishwashers, refrigerators, freezers, washing machines, window air conditioners and electric motors.

Lincoln Electric F/1 Cable Lugs with 3/8 in. Stud Holes (2-Pack)

The Lincoln Electric F/1 Cable Lugs with 3/8 in. Stud Holes (2-Pack) feature copper-tubing construction for durability. An extra long barrel makes for easy soldering, attaching by swedging or crimper for best possible connection. Flared ends means easy cable access for easier insertion of the cable into the lugs hole.

Klein Tools 6-3/4 in. Long-Nose Connector Crimping Pliers with Skinning Hole

The King Krimper is a crimping tool for use with KSC (King Shrink Crimp) wire connectors. The tool features color coded compression slots, which reduces installation error by clearly defining the placement for each connector size. To guarantee a secure splice, this ratcheting tool does not release until the crimp is complete and the connection is secure.

Commercial Electric Ratchet Modular Plug Crimper

The Commercial Electric Ratchet Modular Plug Crimper is a multi-function tool that cuts, strips, and crimps for easy 1-tool application. The crimper offers a ratcheting mechanism that provides a consistent and complete crimp cycle each time.

Klein Tools 6-3/4 in. Long-Nose Connector Crimping Pliers with Skinning Hole

The Klein Tools 6-3/4 in. Long-Nose Connector Crimping Pliers with Skinning Hole offer a wide variety of uses when working with electrical wiring. The long nose design and grooved jaws easily snip and loop wire, while the skinning notch and connector crimp perform reliable stripping and crimping.

Southwire Romex SIMpull 1000 ft. 12/2 NM-B Wire - Yellow

The Southwire Company Romex SIMpull 1,000 ft. 12/2 Type NM-B Cable can be used in your homes exposed and concealed wiring projects. This NM-B cable is designed to be used in dry locations up to 90 degrees Celsius or 194 degrees Fahrenheit. Nylon jackets help significantly reduce pulling force resulting in easier installation.

1/8 in. x 50 ft. Galvanized Uncoated Wire Rope

7 x 7 wire rope is constructed of seven strands of seven wires and is semi flexible. 7 x 7 uses heavier gauge wire and offers better abrasion resistance than 7 x 19. Superior strength allows for multiple uses, such as guy wires, net suspension, animal leash, tether lines and winches. Warning: Do not use for overhead lifting and never exceed the working load limit. Not intended for use as a safety device or in any application where a failure may result in bodily injury or property damage.

Pro Series 4-Gauge 20 ft. Booster Cable

Voltec offers a full line of durable rubber booster cables. These cables are resistant to extreme temperatures, oil and chemicals. The quality rubber insulation and extra fine copper stranding allows tangle free use. Our booster cables are constructed from professional grade a materials to ensure maximum conductivity, quick and easy use during a jump start

Everbilt 1/8 in. x 30 ft. Vinyl-Coated Wire Rope Kit

1/8 in. x 30 ft. Vinyl-Coated Galvanized Wire Rope Kit includes 2 thimbles and 6 clamps for your convenience. This vinyl-coated wire rope kit resists rust for long-lasting use.

Rally Manufacturing Rohs 6 Gauge 16 ft. Booster Cable Box

For all 12 Volt – 24 Volt Vehicles! This Copper Plated Clamps are color coated for easy polarity identification. For use on Cars, Light Trucks, Vans, SUV's & more Copper cables for optimum jump Starting.

Gardner Bender 1/2 in. Blue Insulated Steel Staples for NM Cables (50-Pack)

The Gardner Bender 1/2 in. Blue Insulated Steel Staples for NM Cables (50-Pack) feature insulating saddles that help prevent arc faults caused by over-driven staples. Tips are sharp and burr free for clean penetration.

ELECTRICAL

Leviton Decora 15 Amp Single Pole AC Quiet Switch(10-Pack) - White

Leviton's award-winning line of designer style devices enhance every interior from traditional to contemporary. They easily replaces standard devices throughout your home and add the perfect finishing touch. The Decora offering includes switches, outlets, GFCIs, lighting controls, home automation, multi-room audio/video products, fan speed controls and wallplates.

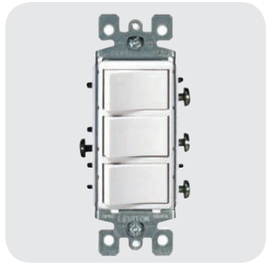

Leviton Decora 15 Amp 3-Rocker Combination Switch - White

The Leviton Decora 15 Amp 3-Rocker Combination Switch features a space-saving design that can fit multiple devices into a single wall box. This white combination switch has 3 rocker switches to control 3 separate fixtures, while its single pole controls light(s) from 1 location. This unit is intended for use with a Decora wallplate.

Leviton SureSlide 600-Watt Dimmer - White

Leviton offers a full line of dimmers and lighting controls that bring Energy Smart Living to your home. These devices easily replace standard wall switches throughout the house and provide an immediate energy payback. Create the perfect mood in any room and save energy by installing dimmers today.

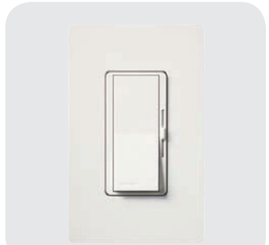

Lutron Diva 600-Watt Single Pole Preset Dimmer - White

Diva from Lutron is a simple and elegant solution designed to match your existing designer opening switches and accessories. This Diva is for use in 600 Watt applications. You can easily turn the lights on and off with the paddle style switch. While the lights are turned on, use the slide control to adjust the lights to your desired level creating your perfect light.

Leviton 3-Amp Appliance Cord Switch - White

Leviton offers a full line of dimmers and lighting controls that bring Energy Smart Living to your home. These devices easily replace standard wall switches throughout the house and provide an immediate energy payback. Create the perfect mood in any room and save energy by installing dimmers today.

VIAIR 40 Amp Relay

For use with all 12-volt compressors. Relays works with compressors that fill air tanks by utilizing a pressure switch. The relay acts as a buffer between the compressor and the pressure switch which can burn out prematurely from experiencing full amp draw of a compressor.

Wink Relay Smart Home Wall Controller

Relay is a wall-mountable touch screen controller that runs the Wink app, giving you instant access to your smart products. Manage lights, locks, appliances, and more all from a central location. This beautifully designed command center is fully loaded with temperature, humidity, sound, and proximity sensors, plus 2 smart light switches; it's like an entire smart home on your wall.

Honeywell Protecto Relay

The Honeywell Protecto Relay provides intermittent ignition oil primary controls to operate the oil burner, oil valve (if desired) and the ignition transformer in response to a call for heat in oil burner systems. Manual trip safety switch lever and lockout indicator light is on the terminal strip which indicates system lockout. Has color-coded lead wires to make it easy for line voltage connections.

Leviton 15 Amp 125-Volt Rubber Grounding Plug

Leviton offers a larger selection of commercial grade straight blade plugs and connectors, with a wide variety of features. Leviton's commercial grade straight blade plugs and connectors are rugged performers. They are moisture, chemical and abuse- resistant and ideal for indoor and outdoor use.

Pass & Seymour 15 Amp 125-Volt Industrial-Grade Straight Plug

The Pass & Seymour/Legrand 15 Amp 125-Volt Industrial-Grade Straight Plug easily connects to an electrical cord to provide an appliance with a connector to a NEMA 5-15 receptacle.

Pass & Seymour 15 Amp 125-Volt Industrial-Grade Angle Plugs

For connecting electrical equipment to NEMA 5-15 compatible outlets, use the Pass & Seymour/Legrand 15 Amp 125-Volt Industrial-Grade Angle Plugs. These plugs are angled for easier connections in confined spaces and offer a corrosion-resistant nylon construction. Maximum value.

Leviton 15 Amp 125-Volt Double Pole 3-Wire Grounding Plug - Black

The Leviton line of residential plugs and connectors has been expanded with the addition of a grounding model available in four colors: Black, Gray, Orange and White and our best-selling 515PV and CV in Orange. Leviton Plugs and Connectors are rugged, easy to wire and feature brass plug blades and connector contacts for maximum conductivity.

Leviton White Outlet-to-Socket Light Plug

For connecting electrical equipment to NEMA 5-15 compatible outlets, use the Pass & Seymour/Legrand 15 Amp 125-Volt Industrial-Grade Angle Plugs. These plugs are angled for easier connections in confined spaces and offer a corrosion-resistant nylon construction. Maximum value.

GE 2-Socket Adapter - Ivory

This two socket adapter allows you to convert a one bulb socket into a two bold socket to add more light. It's for use with a standard (medium base) bulb and socket. It's ideal for your workshop, garage or utility room.

Honeywell Wi-Fi 7 - Day Programmable Thermostat + Free App

Convenient control of your home's thermostat is now literally at your fingertips. Easily view or control your thermostat from anywhere with Honeywell's RTH6580WF Wi-Fi Thermostat. Be alerted of temperature swings or make temperature adjustments remotely. You can trust Honeywell's reliable secure network and enjoy maximum comfort by the #1 choice of homeowners and contractors.

Honeywell Wi-Fi Smart Thermostat

Adjust your thermostat from anywhere. Create your own unique look to match your home's decor. Enjoy unsurpassed comfort control. Receive reminders to change a filter or be alerted of extreme home temps. Beauty and brains collide with Honeywell's Smart Wi-Fi Thermostat.

PermaSleeve 41/64 in. x 7 ft. Heat-Shrinkable Polyolefin White Labels

Adjust your thermostat from anywhere. Create your own unique look to match your home's decor. Enjoy unsurpassed comfort control. Receive reminders to change a filter or be alerted of extreme home temps. Beauty and brains collide with Honeywell's Smart Wi-Fi Thermostat.

3 in. Length Assorted Heat Shrink Black Tubing (160/Kit; 5 Kits per Case)

Assorted Heat Shrink Tubing kit contains 160 3 Inch Tubes in a variety of pre-shrink to post-shrink sizes. Gardner Bender Heat Shrink Tubing (8-Pack) provides abrasion and moisture protection for electrical wire and cable.

125 Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers

The Connecticut Electric 125 Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers features 2 copper-plated buss bars. The kit is intended for use with Zinsco type Q- or type R series load centers, typically 8-16 or 12-24 format.

3/6 Amp Single-Pole Momentary Contact Push-Button Switch - Black

Adjust your thermostat from anywhere. Create your own unique look to match your home's decor. Enjoy unsurpassed comfort control. Receive reminders to change a filter or be alerted of extreme home temps. Beauty and brains collide with Honeywell's Smart Wi-Fi Thermostat.

Lever Operated Switch for Battery Terminal

Stop unwanted battery drain with Battery Doctor's patented Die-Cast Push-On Starter Switch. It's easy to install and simple to use. Simply mounts on negative side battery terminal and flip the switch to quickly disconnect battery. Rated 250 amps continuous and 750 amps surge at 12 volts.

10/8/4 Amp Single-Pole Maintained-Contact Push-Button Switch- Black

GB offers a broad line of switches designed for industrial and commercial applications. This push button switch is rugged and versatile for many applications. The maintained contact, On-Off SPST circuit is a very popular operation. The terminals feature 6 in. 18 AWG wire leads. The push button is black to fit common applications.

Wiser Large Load Controller Single CT Kit (Single Current Transformer (CT) Assembly)

The Schneider Electric Large Load Control Single CT Kit may be added to the Wiser Large Load Controller for energy monitoring on a single conductor. This kit is ideal for monitoring the current on a single conductor of 120 VAC rated load or a balanced load of 240 VAC rated device. When the Wiser Load Control is paired with other Wiser home management system components, such as Wiser In Home Displays, Wiser Smart Plugs, and Wiser Smart Thermostat, home energy management is delivered in one complete seamless, secure and wireless system.

SLA 12-Volt L1 Terminal AGM Battery

The SLA UB12180 12-Volt T4 Terminal AGM Battery is a premium quality absorbed glass mat technology (AGM) is ideal for ATVs, motorcycles, personal watercraft, and snowmobiles. The Adventure Power AGM Battery was designed for more than performance; it was designed for the enthusiast with more cranking power than our competitors' same sized battery. Frequent replacement and high maintenance are over. A one year warranty is also included for your peace of mind. The Adventure Power AGM Battery provides the most power and best value in the industry. Primary Applications: ATV, Emergency Lighting, Gate Opener, Lawn and Garden, Medical Mobility, Security, UPS and Surge Protector.

TeSys D - Contactors and reversing contactors up to 75 kW/400 V and 250 A/AC1

Reversing or non-reversing contactors up to 75 kW/400 V and 250 A/AC1

AC, DC, low-consumption DC control circuit

All types of starter: reversing or non-reversing, star/delta, by auto-transformer, etc

Connectors: spring terminal, EverLink terminal block, screw clamp, ring-type connection, Faston connector.

Easy and simple direct mounting between contactor and circuit breaker, according to EverLink terminal block (from 40 to 65 A).

SinkTop Switch Button - Oil Rubbed Bronze

Replacement SinkTop Switch push buttons. To change button color, pop the old decorative ring off the push button body, replace with the new push button, and push the sides of the new decorative ring until it locks with the push button body.

inkTop Switch Single Outlet for InSinkErator Disposers

The InSinkErator SinkTop Switch Single Outlet for InSinkErator Disposers is a stylish alternative to a wall switch. The Switch is air-activated, mounts easily to your sink or countertop and is ideal for island installations.

WELDING CONSUMABLES



ARCALOY 308/308H-16

Arcaloy 308/308H-16 electrodes were designed for the welding Types 304H & 304 where temperature in excess of 700°F (371°C) requires additional creep strength. They can equally well be used for the welding of stainless steel Types 301, 302 and 305. In some cases where the creep ductility of 347 weld metal is a concern, Arcaloy 308/308H electrodes can be used. The basic-rutile thin coating of Arcaloy 308/308H-16 gives an excellent combination of welding performance in all positions and a high resistance to cracking. Operates on AC or DC current.

ATOM ARC 10018

Atom Arc 10018 electrodes are used primarily for applications which require weld joints of at least 100 ksi (690 MPa) tensile strength, good ductility and crack resistance. Good notch toughness at temperatures as low as -60°F (-51°C) is possible with this electrode. Atom Arc 10018 can be used to weld HY-80 and T-1 steel.

SUREWELD 7024

Sureweld 7024 is a high speed, heavy-coated, iron powder electrode for high deposition rates on horizontal and downhand welding. Excellent operator appeal, produces equal 45° fillets, thereby eliminating over welding. Excellent bead appearance and self-cleaning slag. This electrode has good weldability and superior mechanical properties. It is particularly useful in obtaining increased penetration with little or no root porosity in horizontal or positioned fillets. Sureweld 7024 is ideal for making high speed horizontal fillet and lap welds on mild and some alloy steels, such as earthmoving and construction equipment, truck bodies, ships, barges and railcars. Sureweld 7024 exceeds the AWS A5.1 elongation% and Charpy v-notch requirements for 7024-1.

MIGMASTER 215 Pro/280 Pro

The MigMaster 215 Pro/280 Pro are sturdy and robust step-controlled welding power units. They are intended for medium (215 Pro) to heavy-duty (280 Pro) MIG/MAG welding with solid wires of steel, stainless steel, or aluminum, as well as cored-wires with or without shielding gas. ESABs proven technology and software provide reliability and outstanding welding performance.

CADDY MIG C200i

The Caddy Mig C200i is an easy-to-use, intelligent and powerful machine for MIG/MAG welding mild steels, aluminum and stainless steel as well as MIG brazing. The unit is also extremely portable, making the Caddy Mig C200i an excellent choice for repair, maintenance, and assembly work – both in the workshop and while on the go.

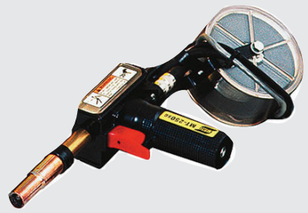

MT-250SG

Features

- Designed for use with the Migmaster Compacts
- Weighs less than 3 lbs.
- Uses durable MT contact tips and nozzles
- Powerful gear motor in handle pulls welding wire from 4 in. diameter spool in the molded gun case
- Partial depression of the torch trigger controls gas pre- and post-flow operations - full depression provides wire feeding as well as gas flow
- Wire feed control mounted on gun provides precise adjustment of wire feed rate at torch MT-250 SG Spool Gun MT-250 SG
- Spool holder adjusts to balance in the operators hand
- 25 ft. service lines

ST-21 Water-Cooled GMAW Gun

Rated at 600 Amps with any shielding gas

Handles flux cored wires to 7/64 in

ORIGO MIG 320/410

The Origo MIG 320/410 are step-switched power sources for medium (320) to heavy-duty (410) MIG/MAG welding. The machines are made with a strong galvanized metal casing to withstand harsh environments. Its large wheels, sturdy lifting eyelets, and an undercarriage designed for forklift transport make the Origo MIG machine easy to move. The wide current and voltage make it easy to optimize settings for a wide variety of filler metals and gases.

ORIGO MIG 320/410

The Origo MIG 320/410 are step-switched power sources for medium (320) to heavy-duty (410) MIG/MAG welding. The machines are made with a strong galvanized metal casing to withstand harsh environments. Its large wheels, sturdy lifting eyelets, and an undercarriage designed for forklift transport make the Origo MIG machine easy to move. The wide current and voltage make it easy to optimize settings for a wide variety of filler metals and gases.

Rugged 250 Amp, 100% duty cycle performance

- Service lines enter the rear of gun instead of handle for improved balance and accessibility
- Inching pushbutton mounted on bottom of handle
- 30 ft. service lines
- Designed for use with Migmaster Compacts
- Weighs less than 3 lbs.
- Uses durable contact tips and nozzles
- Powerful gear motor in handle pulls welding wire from 4 in. diameter spool in the molded gun case
- Partial depression of the torch trigger controls gas pre- and post-flow operations - full depression provides wire feeding as well as gas flow
- Wire feed control mounted on gun provides precise adjustment of wire feed rate at torch

WELDING CONSUMABLES

CRYO-SHIELD 308L

Cryo-Shield 308L is an all-position wire adaptable to a variety of shop and field erection applications. The use of argon/CO2 gas shielding is recommended for maximum toughness. Designed for cryogenic applications where good weld metal toughness is required. Applications include cryogenic vessel fabrication and process piping repair. Cyro-Shield 308L is guaranteed to produce a minimum of 15mils lateral expansion at -320°F.

DUAL SHIELD 700X

Dual Shield 700X is a high deposition, deep penetration wire for joining of heavy structural steel components. Designed for flat and horizontal position welding using CO2 shielding gas, this X Series wire provides high deposition rates, high efficiency and excellent performance. The bead contour, smooth ripple and slag chemistry allow easy slag removal even in narrow groves.

OK TIGROD 308L

- OK Tigrod 308L has a good general corrosion resistance. It also has a low carbon content which makes this alloy particularly recommended where there is a risk of intergranular corrosion. The alloy is widely used in the chemical and food processing industries as well as for pipes, tubes and boilers.
- For joining of stainless steels of 18% Cr - 8% Ni-type with low carbon content and Nb-stabilized steels of the same type if the service temperature will not exceed 6500C.

SHIELD-BRIGHT 410 NIMO

Shield-Bright 410NiMo is an all-positional gas shielded flux cored wire for fabrication and repair of hydroelectric turbine "runners" and other similar applications. Its spray-like transfer enhances the arc characteristics while minimizing post-weld clean up and rework.

The ease of use and "user-friendly" characteristics minimize training while producing consistent quality welds. The self-peeling slag removal and easy post-weld clean up minimize the cost to deposit while improving performance efficiency. This electrode is designed for use with Argon/CO2 shielding gas (75 to 80% Argon, balance CO2).

DUAL SHIELD II 100

Dual Shield II 100 is an all-position flux cored electrode that combines a high strength deposit with excellent impact toughness and low diffusible hydrogen levels. The rutile basic slag system produces a smooth spray-like transfer with reduced spatter and low post weld cleanup. Dual Shield II 100 is designed to join high strength steels such as HY-80 and T-1 the as welded or stress relieved condition using a 75% Ar / 25% CO2 shielding gas. It is especially well suited for high tensile steels that are used in sub-zero temperatures. The weld metal analysis is similar to an E10018-M low hydrogen electrode.

OK AUTROD 13.20SC

- ESABs OK Autrod 13.20SC is a copper-coated low alloy submerged arc wire designed for the welding of creep-resistant steel of the (2.5% Cr) (1% Mo) type. When combined with OK Flux 10.63, OK Autrod 13.20SC produces a metalurgically clean weld which is capable of meeting X-factor of less than 15. This combination fulfills the stringent requirements for toughness after step cooling treatment of the weld metal. OK Autrod 13.20SC can also be combined with OK Flux 10.62 for applications not requiring step cooling treatment.
- OK Autrod 13.20SC is used for welding process piping, heat exchangers, and pressure vessel fabrication.

CRYO-SHIELD 308L

- Designed for quality TIG welding with all types of metals
- Extremely easy to use – all welding parameters displayed in an easy-to-understand format
- Innovative QWave™ feature – enables AC welding with exceptional arc stability and low noise
- AC frequency and balance control – optimizes weld pool
- Electrode preheating – facilitates excellent starts and extends electrode life
- ESAB 2-Program function – allows preprogramming and program changes during welding
- DC Pulsed TIG welding – for easy control of heat input and weld pool
- DC Micro Pulse – minimizes area affected by heat, particularly when working with thin metals
- Hot start, Arc force and polarity switch (DC) – create true MMA (Stick) characteristics in AC and DC mode
- Equipped with large OKC 50 cable connectors – for greater durability
- Features compact design with impact resistant polymer and aluminum casing – makes the unit lightweight and easy to carry
- Small size does not compromise vital cooling of internal components

TXH AIR/WATER COOLED TORCHES

Manufactured with high temperature resistant silicone rubber insulation, TXH torches are lightweight and durable. All copper components ensure cooler running temperatures and maximum current capacity and and ergonomic handle system with integrated dual soft grips ensure the handle remains in place with minimal grip pressure.

Features

- TXH torches are designed to provide the utmost in convenience, versatility, and ergonomics to the welder,,
- Choose between air-cooled and water-cooled versions, with or without gas valve, and with or without a flexible neck to suit specific applications
- ,,The torch heads are manufactured with high temperature resistant silicone rubber insulation
- ,,All copper components ensure cooler running temperatures and maximum current capacity
- ,,Integrated dual soft grips ensure the handle remains in place with minimal grip pressure
- ,,Positioning of the torch is made easier by the combination of knuckle joints and a flexible leather section covering the first 31.5 in. (800 mm) of the torch immediately behind the handle

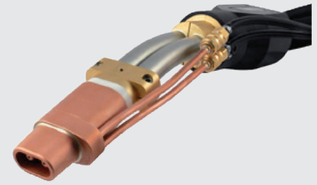

ARISTO RT ROBOTIC TORCHES

The new range of Aristo RT robotic torches offer world class performance in single arc or tandem applications.

These torches are designed for common robotic welding applications and are available for the following robotic packages:

- Standard Wrist (external cable)
- Helix - Hollow Wrist (+/- 220°)
- Infiniturn - Hollow Wrist (endless rotation)

Three gas-cooled models and three water-cooled models are available in different swan neck angles

Packages are available for ABB, Fanuc, KUKA, and Motoman/Yaskawa robotic systems

Special Features

- Built in blow out port can be used for cooling and/or cleaning of the torch neck
- Long-life consumables, torch body, and spare parts
- Designed for all robot types and models
- Quick-change torch system
- Simple cable replacement
- Air and water-cooled torches use the same spare parts
- Threaded gas nozzles with additional clamping for better heat transfer prolongs consumable life
- Optimized gas flow provides stable and reliable welding arc

Industry Best TCP (Tool Center Point)

Collision-resistant torch design means no re-adjustment of the torch neck reducing downtime and improves productivity

Constant TCP even when changing necks or cables, reduces part programming and program "touch up" time

SAFETY ITEMS

DeWalt Safety Goggles

DeWalt® Safety Goggles feature a low-profile design that provides a full field of vision. Features ToughCoat™ hard-coated clear polycarbonate lens with XtraClear™ anti-fog lens coating that meets ANSI standards and provides UVA/UVB protection. Rubber frame protects eyes from dirt and debris.

Justrite AccuFlow Type II Safety Fuel Can

The Justrite AccuFlow™ Type II safety can goes beyond protection and compliance to provide fast, precision pouring of flammable liquids. Patented, innovative manifold automatically vents for smooth liquid flow. Comfortable Safe-Squeeze® trigger offers maximum control when pouring. A flexible 9in. metal hose ensures targeted pouring into small openings.

adians Class 2 Fire-Retardant Mesh Safety Vest

Radians Class 2 vest offers ANSI 107 compliant FR protection at an economical price. Excellent choice for extreme work environments like petrochemical, asphalt paving, short-term labor and welding where a non-durable FR level of protection is sufficient. Has upper left front and lower right inside pockets. Features 2in. silver tape reflective stripe over each shoulder and one horizontal stripe around torso. Made of NFPA 701 (2004) FR treated polyester mesh.

3M Hard Hat with Ratchet Adjustment

Radians Class 2 vest offers ANSI 107 compliant FR protection at an economical price. Excellent choice for extreme work environments like petrochemical, asphalt paving, short-term labor and welding where a non-durable FR level of protection is sufficient. Has upper left front and lower right inside pockets. Features 2in. silver tape reflective stripe over each shoulder and one horizontal stripe around torso. Made of NFPA 701 (2004) FR treated polyester mesh.

Class 3 High-Visibility 3-in-1 Bomber Jacket with Teflon

Class 3 High-Visibility 3-in-1 Bomber Jacket with zip-out fleece liner is three jackets in one! High denier nylon shell with DuPont Teflon fabric protector is durable and resists water, mud, grease and dirt. Shell is lined with quilted 4 3/4-oz. polyfill for warmth. Has heavy-duty nylon front zipper with button-close storm flap, left chest pocket and front cargo pockets with pass-behind handwarmer pockets. Elastic cuffs with Velcro strap and elasticized waist. Class 3 approved silver reflective stripes over shoulders, around torso and arms. Meets ANSI 107-2010 specs. Zip-out black polyester fleece liner can be worn by itself or as a layer with shell. Features dual handwarmer pockets, elastic cuffs and nylon front zipper.

FallTech Comfortech 3 D-Ring Harness

FallTech Comfortech 10ft. 3 D-Ring Harness is an effective, economical unit utilizing 1 3/4in. seatbelt style webbing and a simple inertial locking mechanism. Harness provides support and pressure point relief with memory foam and silicone gel in the padded waist belt, shoulder straps, and the twin leg pads. Includes 1 1/8in. carabiner for the anchorage connection, mounted on a galvanized steel swivel shackle. Features our standard double-locking snap hook for back D-ring attachment. The overall strength of this unit exceeds the ANSI requirements by greater than 10%!

Little Giant Type 1A Safety Step Step Stool

Little Giant® engineered a unique combination of strength and simplicity into the Safety Step step stool, designing it to be opened and closed with one hand and allowing it to be stored just about anywhere. This tough, compact stepladder can handle just about any task, from the lightest household chore to the heaviest industrial job.

3M Reflective Tape

50-yard roll of 2in. reflective tape with alternating red and white pattern.

JBC Revolution Series Traffic Cone

The JBC Revolution Series utilizes premium grade PVC injection molding technology to produce extremely durable traffic cones. Features 3M reflective collar for visibility at night. Meets NCHRP-350 and MUTCD requirements. Fluorescent Orange.

Plastic Chain

This 20ft. long Plastic Chain can be used when directing crowd lineups, protecting landscaping, identifying dangerous areas, and hanging light plants or other light objects for decorative purposes. Black.

FallTech 18in. Tool Leash Tether

he FallTech 18in. Tool Leash Tether attaches easily to a variety off tools and belts to securely keep dropped tools from falling to a lower level and potentially striking other workers. It reduces potential for injuries and saves tools from damage.

First Alert Fire Extinguisher

The First Alert Compliance Fire Extinguisher is a reliable type 2-A:10-B:C rated fire extinguisher ideal for meeting minimum fire extinguisher codes. This compact rechargeable extinguisher can fight wood, fabric, paper, flammable liquid and electrical fires. Durable metal head designed to meet fire extinguisher codes. If used, unit is rechargeable by certified professionals. Includes code compliant wall mounting hook to keep unit secure. Meets UL standards.

SAFETY ITEMS

CLC Durable Foam Kneepads

These CLC Custom Leathercraft Durable Foam Kneepads feature extra-length thick molded foam for maximum comfort and protection. Double adjustable elastic straps for a better fit.

FallTech 8ft. Retractor/Anchor Kit

The FallTech 8ft. Retractor/Anchor Kit features a retracting design which allows device to be mounted overhead at greater heights compared to traditional lanyards. Carabiner provides safe attachment to anchorages while swivel shackle allows device to turn when user moves. 36in. anchor strap takes guesswork out of choosing the correct anchor for device mounting.

Justrite Poly Funne

The Justrite Poly Funnel provides an easy and economical way to pour gas, oil, diesel, kerosene and other liquids into smaller openings. Made of durable polyethylene and can be slipped on and off safety can as needed.

AC Blower With Canister

This versatile system includes an 8in. plastic Compaxial blower powered by a 115V AC motor, canister and 15 feet of ducting. Lightweight unit has quick connect clipping system for tool-free attachment to input side of canister for extraction or output side of canister for ventilation.

Carolina 8in. Waterproof Insulated Safety Toe EH Work Boot

The Carolina 8in. waterproof insulated safety toe EH work boot is a classic in comfort, style and protection. Crazy Horse leather uppers are lined with Scubaliner™ for 100% waterproof protection and insulated with 600 grams of Thinsulate™ for all-day warmth. Composite safety toes meet ASTM standards for protection against unexpected hits. Pillow Cushion™ insoles combined with removable AG7™ polyurethane footbeds pamper your hard-working feet while EVA midsoles absorb impact from every step you take, and non-metallic shanks provide stability. Long-wearing, slip-resistant rubber outsole is EH protected, and padded tongues and collars are super comfortable. Cement construction. Sizes 8–11 1/2, 12, 13, 14. Regular or Wide widths.

LaCrosse Rubber Knee Boots

These rugged LaCrosse Rubber Knee Boots provide great protection in muddy, grimy jobsites. These knee boots are 100% waterproof for your comfort. Slip-resistant sole and safety toe prevent workplace injuries.

Coxreels EZ-Coil Safety Series Power Cord Reel

Power cord reel with patented EZ-Coil safety spring controlled retraction eliminates workplace accidents by reducing auto rewind speeds by up to 80%! No effect on pullout tension. Guide arm adjusts to wall, floor and overhead mounting positions.

Mechanix Wear Safety M-Pact Gloves

These rugged LaCrosse Rubber Knee Boots provide great protection in muddy, grimy jobsites. These knee boots are 100% waterproof for your comfort. Slip-resistant sole and safety toe prevent workplace injuries.

Ultra-Tow Safety Tow Cables with Safety Hooks

These Ultra-Tow Safety Tow Cables with Safety Hooks work in place of safety chains when towing a trailer. 5,000-lb. working load capacity.

CLC Gel-Tek Stabili

The CLC Custom Leathercraft Gel-Tek™ Stabili-Cap™ Articulated Kneepads are comfortable, protective flexible plastic kneepads designed to prevent injury on the job. Injection-molded polyurethane and gel technology give our contour-fit knee cups unsurpassed all-day comfort and support. Enables easy movement.

Coxreels EZ-Coil Safety Series Power Cord Reel with Quad Receptacle

Power cord reel with patented EZ-Coil safety spring controlled retraction eliminates workplace accidents by reducing auto rewind speeds by up to 80%! No effect on pullout tension. Guide arm adjusts to wall, floor and overhead mounting positions.

Coxreels EZ-Coil "Safety" Hose Reel

Coxreels patented EZ-Coil controlled rewind reduces retraction speed up to 80%, increasing operator safety and protecting property. No power source required. No effect on pull-out tensions. For air, water or oil. Equipped with all the high-quality features and components found in Coxreels standard "Performance" series reels with the extra added safety of EZ-Coil. Controlled retraction reduces workplace accidents and injuries caused by careless hose reel operation. Guide arm adjusts for various mounting positions. Locking ratchet secures desired hose length. Hose not included. 150°F maximum temperature

Vestil Indoor Personnel Guide Barrier

Vestil wall mount indoor personnel guidance barrier keeps lines flowing smoothly. Perfect for restaurants, offices, hospitals, schools, and banks. Ideal for indoor applications.

Vestil Aluminum Expanding Safety Gate

Designed to set up quickly and easily wherever and whenever Aluminum Expand-A-Gate is needed. Ideal for preventing potential accidents.

Vestil 90° Triple Elbow Guard

Triple elbow guard protects the corners of machinery, buildings and offices. The 90° bend fits snug around corners to provide the ultimate protection against potential damage from fork trucks or other mobile equipment

PACKAGING

Gorilla Tape

Gorilla Tough is now available on a roll, and this tape is truly The Toughest Tape on Planet Earth! More than just duct tape, Gorilla Tape bonds to things ordinary tape can't, like stucco, brick, wood, metal, smooth shiny surfaces and more. Double-thick aggressive adhesive fills in gaps for a stickier grip, especially in applications involving rough, porous or imperfect surfaces. Strong reinforced backing resists weather and rough use, offers a tighter barrier against moisture and higher UV qualities, yet can be ripped by hand.

"Fix-It" DUCTape
Home and office general repairs
Réparation générale pour maison & bureau
Reparaciones generales para hogar y oficina

Gray (Duct) Tape

Gray duct tape has dozens of uses such as temporary repairs or emergency tie downs.

Vestil Floor Tape Applicator

Designed to apply tape as you walk.

Milwaukee M18 Cordless 10oz. Caulk and Adhesive Gun

The Milwaukee® M18™ Cordless 10oz. Caulk and Adhesive Gun delivers caulk or adhesives smoothly and steadily with superior bead control, even with the highest viscosity materials, with incredible pushing force. All-metal gears provide an incredible 950 lbs. of force, and CFTTM Constant Flow Technology eliminates motor oscillation for steady dispensing and even beads at all viscosity levels. A variable-speed trigger and 6-setting maximum speed dial optimize the tool's 0-21 inches per minute (IPM) flow rate. The exclusive Milwaukee anti-drip mechanism prevents oozing of excess material when the trigger is released. A rotating collar gives you maximum bead control around turns, and the quick-change carriage design lets you change between 10-oz, quart and sausage-style containers. The M18 RedLithium battery lets you dispense more than 200 10-oz. tubes of construction adhesive on one charge. Bare tool comes with a 10-oz. carriage and 10-oz. plunger rod and piston assembly.

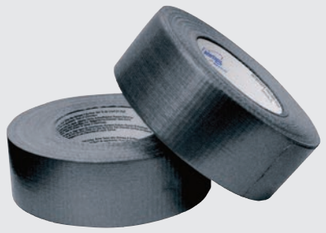

Black (Duct) Tape

Versatile duct tape has dozens of uses. Polyethylene-coated adhesive cloth tape. 2in. W x 60 yard roll. Black.

Caulk Warmer Bag

ProSeries adhesive packaging tape is an excellent all-purpose 2 mil acrylic adhesive tape.

Intertape Tape Dispenser with 2 Rolls of Tape

Pistol grip dispenser has adjustable tension control. Comes with 2 rolls of carton sealing tape.

Blazer Conspicuity Tape

This Blazer Conspicuity Tape is a highly reflective material rated at 600 candle power with industrial-strength adhesive backing.

Vestil Multi-Task Packaging Cart

The Vestil Multi-Task Packaging Cart minimizes packaging time and costs by keeping wrapping and strapping components organized and readily available.

Features + Benefits

- Cart has dispensing ability for one steel and one poly strapping roll
- Each strapping compartment includes a tensioner for controlled strap dispensing
- Compartment doors also serve as ramps to easily roll strapping up into cart
- 3 1/4in.W steel strapping compartment
- 6 1/4in.W poly strapping compartment
- Detachable pallet wand for use with poly strapping (max. 5/8in. wide)
- Simply attach strapping to the end of the wand, and then use wand to fish strapping through pallet to other side
- Maximum roll width: 26in.
- 22in. maximum strapping diameter

Roughneck High Table Strapping Machine

This semi-automatic Roughneck® High Table Strapping Machine is fully portable and dispenses, tightens and seals poly strapping around packages 2in. or larger. Works with strapping rolls with an inner core size of 8in.

Features + Benefits

- Stands 28 3/4in.H
- Equipped with an internally located strap coil
- Simple design allows for easy routing of polypropylene straps
- Enclosed cabinet provides storage area
- Adjustable strap tension and length offers versatility
- Low-voltage control circuit for operator safety
- Two energy-saving 24V DC motors (one 90W and one 60W) deliver 1/5 HP total
- Motors automatically switch off after a minute of inactivity and restart as the strap is inserted
- Four 3in. swivel rubber casters (two with brake) offer easy maneuverability

www.athma.info | 0495 4060013

CANTECH
Trading L.L.C.

Cantech Trading L.L.C
Deyaar Building, Office Number - 113,
Damascus Street
Al-Qusais - Dubai, Uae
P.o.box: 33158
Tel:+971 4 2632647 | Fax+971 4 2632649
Mob : +971554781754
sales@cantech.ae | www.cantech.ae